Traverse table of line beg. at S.E. Cor. of N.E 1/4 Sec. 7. T. 5. N. R. 1. W. as shown below

	Distance	N	S	E	W	
N 88°-33'-30" W	703.0	17.6			702.8	along 1/4 sec. line
N 13°-28' E	80.7	78.5		18.8		
N 46°-42' E	91.2	62.5		66.4		along W. side of St
		158.6		85.2	702.8	

Traverse table of the boundaries of the tract of land. beg. at S. end of the tract

N 13°-28' E	435.9	423.9		101.5	
S 43°-20' E	238.9		173.8	163.9	
S 46°-40' W	364.6		250.2		265.2
		423.9	424.0	265.4	265.2

By the Ogden Milling & Elevator Co.

Description - of tract deeded to Riverdale Canning Co. Pt. N.E 1/4 Sec. 7. T. 5. N-R. 1. W. S.L.M.
Beg. at point 637.6 ft N 75°-36' W from S.E. Cor. of said 1/4 Sec. said pt being on W. line of Co. Road as located & surveyed. said point is also 50. ft dist at R.A on E. side center of U.R.R.R.
Running thence N 13°-28' E 435.9 ft. par. to said Rail road
thence S 43°-20' E 238.9 ft. to the W. line of said Co. Road as located & surveyed. thence
S 46°-40' W. along W. line sad road
364.6 ft. to beg. 1. a.
Feb. 8-1903.

To be deeded by The Ogden Milling & Elevator Co. to The River Dale Canning Co. one acre

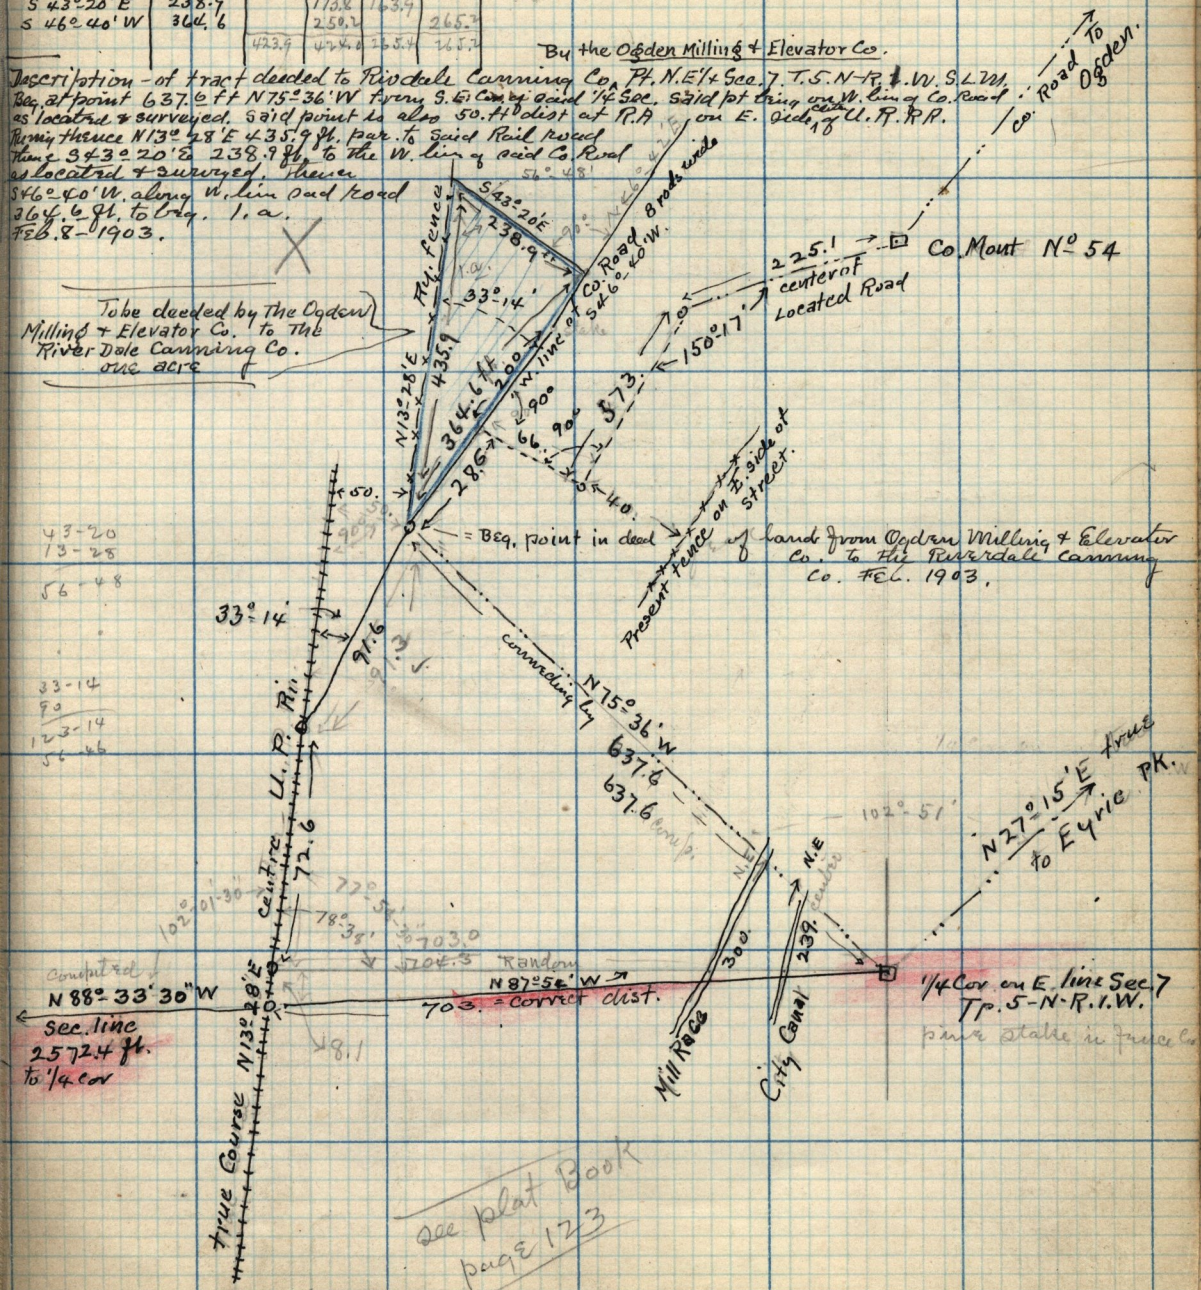

43-20
13-28
56-48

33-14
90
123-14
56-46

see plat Book page 123