Monday P.M. Oct 7th

Survey for location of buildings preparatory to the opening 33.0 ft Street through Block 26 Plat A from 25th to 24th Streets.

Inst over Mt #4 B.S. on Mt #11 double centered & set Hub 216.5' being an 8.0 offset West of C line of proposed 33.0 Street through Block 26

Thence Ist over Hub B.S. on Mt #11 90° R & North (repeated) & set Hub about 300 feet North for F.S.

Ist over Mt #5 F.S. on Mt #15 set Hub 216.5' East
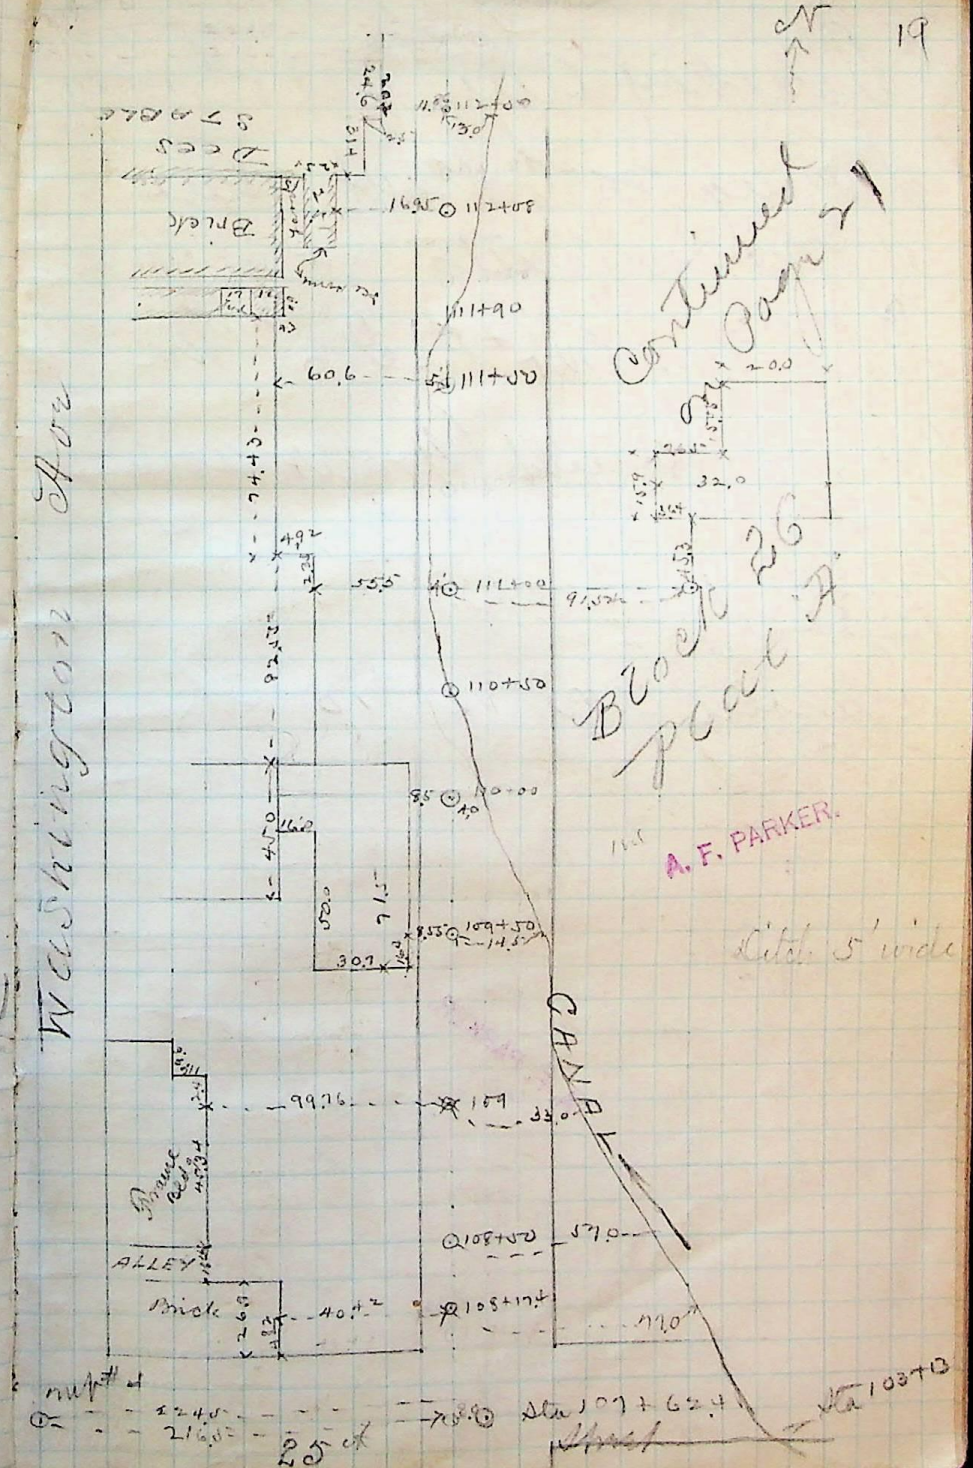
A. F. PARKER.